
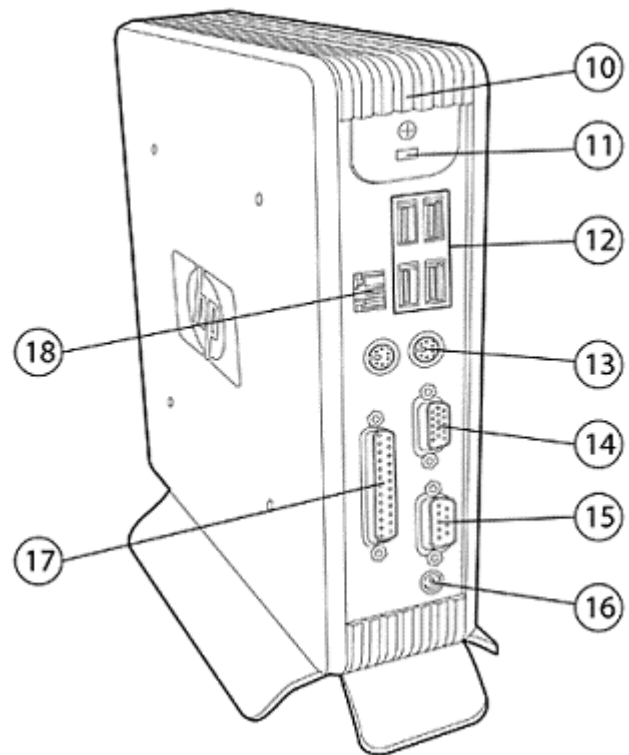


Overview

Introduction

The HP Compaq t5530 Thin Client delivers a great desktop experience for general office applications or your specific line of business software. This unit's enhanced features make it ideal for mainstream business use, with support for legacy ports, ICA, RDP, terminal emulation, Windows Media Player, and basic web browsing. The HP t5530 can provide convenient access to server-based computing solutions, HP's Consolidated Client Infrastructure (CCI), or a variety of remote desktop solutions.

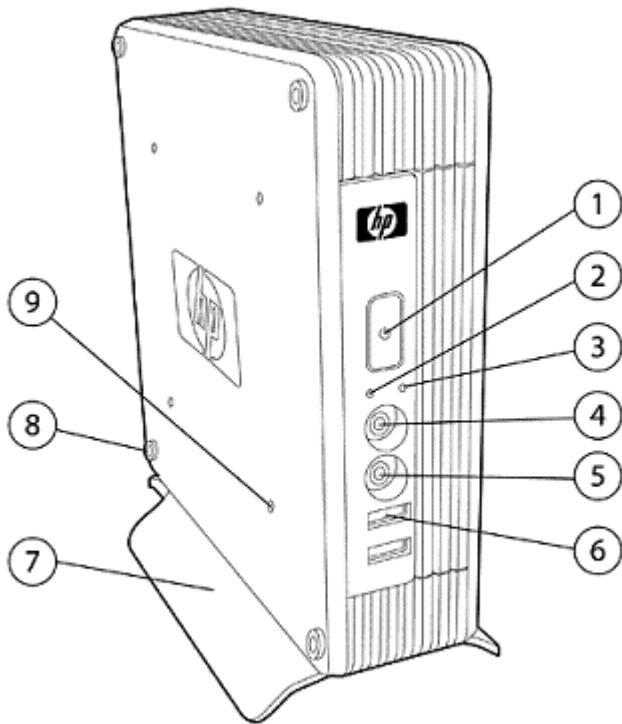

1. Power button
2. Flash activity indicator
3. Power on indicator
4. Audio connector (headphone out)
5. Audio connector (mic in)
6. USB connectors (2)
7. Vertical stand
8. Feet (4) for horizontal orientation
9. HP Quick Release mounting points (4)

10. Secure USB compartment
11. Kensington lock slot
12. USB connectors (4)
13. PS/2 connectors (2)
14. VGA connector
15. Serial port connector
16. +12V DC power input
17. Parallel port connector
18. 10/100 RJ-45

Overview

At A Glance

- Microsoft® Windows® CE 6.0 operating system
- Via Eden 800 MHz processor
- 128 MB System memory (16 MB reserved for video)
- 64 MB Flash memory
- Includes one parallel, one serial, two PS/2, and eight USB 2.0 ports (four in back, two in front, and two in secure USB compartment).
- Two USB ports and audio ports in front for your convenience.
- Two USB ports in a secure compartment help prevent theft with USB options hidden inside and out of your way. Great for safeguarding USB wireless and Flash devices.
- HP's alliance with Altiris brings a leading management solution to the thin client market. Altiris Deployment Solution's standards-based, advanced thin client management solution helps reduce the costs of deploying, updating, and maintaining your thin clients. Included with each HP client!
- Exclusive HP ThinState Tools offers in-box, easy-to-use, scalable image deployment and recovery tools. HP ThinState Tools allow administrator to make changes to image or settings on one "master" client, capture the new image and settings on a USB flash drive or on the thin client itself, and then easily deploy it to "target" thin clients.
- Support for HP OpenView Client Configuration Manager for quick and easy deployment of images and thin client management. A free download of OV CCM (basic edition) for the HP t5530 is available from HP.
- Selectively disable USB ports for enhanced security.
- Support for selected options and peripherals.
- Protected by Hewlett-Packard Services, including a limited three-year warranty – certain restrictions and exclusions apply.

Models

RK270AA#ABA	Model Name	HP Compaq t5530 Thin Client
RK270AT#ABA (SmartBuy or Promo)	Processor	VIA Eden 800 MHz
	Flash	64 MB
RM080AA#ABA (TAA compliant) ¹	System Memory	128 MB (16 MB reserved for video)
	Operating System	Microsoft Windows CE 6.0
	Keyboard	USB or PS/2 (both supported) Keyboard included with every thin client. Type of included keyboard (USB or PS/2) varies by region.
	Mouse	USB or PS/2 (both supported) Mouse included with every thin client. Type of included mouse (USB or PS/2) varies by region.

¹ Product complies with U.S. Trade Agreement (TAA). Available in U.S. only.

Options

		Part Number
Accessories	HP Quick Release Kit	EM870AA
	HP Integrated Work Center Stand	GN783AA
	50 Watt External Power Supply	FJ851AA
Third-party Communications	Belkin Wireless G USB Adapter ^{1,2} (Security: WEP, WPA & WPA2 only) (North America, Singapore, Hong Kong, Malaysia, Philippines, India, Korea, China, Taiwan, Australia, New Zealand) NOTE: Supported under Windows CE 5.0 only, will not work with Windows CE 6 To order, visit www.belkin.com , search for HP4050, and order online	Belkin part number: HP4050
	Belkin Wireless G USB Adapter ^{1,2} (Security: WEP, WPA & WPA2 only) (Germany, Netherlands, Spain, Italy, France, Poland, Hungary, Czech, Russia, Bulgaria, Romania, United Kingdom, Sweden/Scandinavia) NOTE: Supported under Windows CE 5.0 only, will not work with Windows CE 6 To order, visit www.belkin.com , search for HP4050ea, and order online	Belkin part number: HP4050ea
Touch Screens	ELO Touch 1529L Flat Panel – USB /serial combo ¹	E926109
	HP L5006tm LCD Touchscreen – USB/serial combo ^{1,5}	RB146AA
Security	HP USB Smartcard Keyboard	ED707AA
	SCM USB Smart Card Reader SCR331 ¹	904622
	HP/Kensington Cable Lock	PC766A
Input Devices	HP PS/2 Standard Keyboard	DT527A#ABA
	HP USB Standard Keyboard	DT528A#ABA
	HP USB Smartcard Keyboard	ED707AA#ABA
	HP PS/2 2-Button Scroll Mouse	DD440B
	HP PS/2 2-Button Optical Scroll Mouse	EY703AA
	HP USB 2-Button Optical Scroll Mouse	DC172B
Storage	Apacer 512 MB Disk on Key (DOK) ¹	AP-HHR512HD2
	Apacer 1 GB Disk on Key (DOK) ¹	AP-HHR100HD2
	Apacer 2 GB Disk on Key (DOK) ¹	HHR2009D2G
	External USB 2.0 Multibay II Cradle	PA509A
	Multibay II DVD Drive (Does not support DVD play back)	PA849A
Software	WinCE-Special Purchase only Viewers	EY763AA

Options

Care Pack Services	9x5 Next-Business-Day ³ Advanced Exchange – 3 Years	331653-001; U4847E ⁴
	9x5 Next-Business-Day ³ On-Site Coverage – 3 Years	331655-001; U4849E ⁴

¹This is a third party product. Product, warranty and support available directly from third party vendor.

² Wireless access point and Internet service sold separately. Roaming not supported. See Administrator's Guide for supported wireless features.

³ Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Restrictions and limitations apply. For details, visit: <http://www.hp.com/go/carepack>.

⁴ 4U4847E is available in all regions; U4849E is available in Americas and Asia-Pacific/Japan.

Technical Specifications

Processor	VIA Eden 800 MHz																								
Chipsets	Northbridge: VIA CN700; Southbridge: VIA VT8237																								
Memory	Flash 64 MB System Memory 128 MB (16 MB reserved for video)																								
Graphics	VIA S3 graphics with support for high-resolution monitors up to 1680 x 1050, or up to 32 bit <table><thead><tr><th>Mode</th><th>Refresh Rates</th><th>Color Depth</th></tr></thead><tbody><tr><td>800 x 600</td><td>60, 75, or 85 Hz</td><td>8, 16, or 32 bit</td></tr><tr><td>1024 x 768</td><td>60, 75, or 85 Hz</td><td>8, 16, or 32 bit</td></tr><tr><td>1280 x 1024</td><td>60, 75, or 85 Hz</td><td>8, 16, or 32 bit</td></tr><tr><td>1600 x 1200</td><td>60, 75, or 85 Hz</td><td>8, 16, or 32 bit</td></tr><tr><td>1600 x 1200</td><td>60 Hz</td><td>32 bit</td></tr><tr><td>1440 x 900</td><td>60 Hz</td><td>16 or 32 bit</td></tr><tr><td>1680 x 1050</td><td>60, 75, or 85 Hz</td><td>16 or 32 bit</td></tr></tbody></table>	Mode	Refresh Rates	Color Depth	800 x 600	60, 75, or 85 Hz	8, 16, or 32 bit	1024 x 768	60, 75, or 85 Hz	8, 16, or 32 bit	1280 x 1024	60, 75, or 85 Hz	8, 16, or 32 bit	1600 x 1200	60, 75, or 85 Hz	8, 16, or 32 bit	1600 x 1200	60 Hz	32 bit	1440 x 900	60 Hz	16 or 32 bit	1680 x 1050	60, 75, or 85 Hz	16 or 32 bit
Mode	Refresh Rates	Color Depth																							
800 x 600	60, 75, or 85 Hz	8, 16, or 32 bit																							
1024 x 768	60, 75, or 85 Hz	8, 16, or 32 bit																							
1280 x 1024	60, 75, or 85 Hz	8, 16, or 32 bit																							
1600 x 1200	60, 75, or 85 Hz	8, 16, or 32 bit																							
1600 x 1200	60 Hz	32 bit																							
1440 x 900	60 Hz	16 or 32 bit																							
1680 x 1050	60, 75, or 85 Hz	16 or 32 bit																							
Input/Output/ Peripheral Support	Keyboard USB or PS/2 (both supported) Keyboard included with every thin client. Type of included keyboard (USB or PS/2) varies by region. Mouse USB or PS/2 (both supported) Mouse included with every thin client. Type of included mouse (USB or PS/2) varies by region. Printer Local (ThinPrint .print TCP Client) and/or network printers (RDP, ICA, LPD, JetCET) Video VGA-type video output (DB-15)																								
Audio	Output Internal amplified speaker, 1/8-inch mini, full 16-bit stereo, 44-kHz sample rate Input 1/8-inch mini microphone																								
Security	Security lock slot (cable lock sold separately)																								
Terminal Server Protocols	Integrated Microsoft RDP 6 for Windows CE 6.0; (RDP 5.5 for Windows CE 5.0) and Citrix ICA 9.X for remote server access.																								
Networking	TCP/IP with Dynamic DNS and DHCP support 10/100 BaseT Fast Ethernet, twisted pair (RJ-45) Direct connection via RS-232, Point-to-Point Protocol (PPP), Point-to-Point over Ethernet (PPPoE) VPN connection via MS Point-to-Point Tunneling Protocol (PPTP), Layer-2 Tunneling Protocol (L2TP) Supports Citrix load balancing on ICA Simple Network Time Protocol (SNTP) DHCP with FTP option for automatic updates Microsoft SMB (Server Message Block) for deploying image from a PC that has been defined as a shared resource (No need to set up FTP Server, if this option is used) Wake on LAN PXE																								
I/O ports and connectors	8 USB 2.0 ports , 1 Serial, 1 Parallel, 2 PS/2 connectors																								
Resident Operating System	Microsoft Windows CE 6.0 (5.0 in EMEA only)																								
Server OS Compatibility/	<ul style="list-style-type: none">● Citrix Presentation Server (up to 4.5) including the Desktop Broker feature																								



Technical Specifications

Support	<ul style="list-style-type: none">● Citrix Metaframe Presentation Server 3.0, Citrix Metaframe XP Presentation Server● Citrix Metaframe 1.x● Windows 2000/2003 Server families● Windows 2000/2003 Server Terminal Services● Windows 2000 Advanced Server, Windows 2000 Advance Server Terminal Services● Microsoft® Windows® NT 4.0 Server● Windows NT 4.0 Terminal Server Edition● VMware Virtual Desktop Infrastructure using RDP
Session Allocation Managers/Session Brokers	<ul style="list-style-type: none">● HP PC Session Allocation Manager Software for HP's Consolidated Client Infrastructure● Citrix Dynamic Desktop Initiative● Provision Networks Virtual Access Broker (contact Provision Networks directly for sale and support)
Software Included	<p>Microsoft Windows CE 6.0 Operating System (5.0 in EMEA only) Microsoft Internet Explorer 6.0 for Windows CE Microsoft Windows Media Player 9.0 for Windows CE Full license of Altiris Deployment Solution (client agent) is preinstalled on every thin client. Note: Altiris Deployment Solution (management console) is available as free download from Altiris at: NOTE: Altiris Deployment Solution (management console) is available as free download from Altiris at: http://www.altiris.com/hptc HP OpenView Client Configuration Manager (basic edition) is available for free download at: http://www.openview.hp.com/products/ccm/download.html HP ThinState Tools for easy deployment Thinprint .print TCP client for enhanced local printing JetCET Print Professional Teemtalk (CE Terminal Emulation Software) VNC for remote control txtpad Other software available as add-ons (see http://www.hp.com/support for list of available add-ons)</p>
OS Languages	English
Dimensions H x W x D	Without stand 18.57 x 18.57 x 5.24 cm (7.31 x 7.31 x 2.06 in) Stand only Height: 1.9 cm (0.75 in)
Weight (approximate)	With stand 1.3 kg (2.9 lbs) Stand only 30 g (~1 oz)
Environmental	Operating temperature range 50° to 104° F (10° to 40° C) Non-operating temperature range -22° to 140° F (-30 to 60° C) Humidity 20% to 80% condensing/ 10% to 95% non-condensing
	Power Worldwide auto-sensing 100 to 240 VAC, 50 to 60 Hz Average power consumption of this thin client in a typical setup is 14.0 W.
Regulatory Compliances	Product Safety <ul style="list-style-type: none">● International: IEC60950-1, 12:2005, with CB Certificate and all National Deviations● US and Canada: UL 60950-1 / CAN/CSA 22.2 No. 60950-1-03, 07:2006, Bi-National Standard for ITE Safety in the US and Canada and is published jointly by UL and CSA.● Europe: EN 60950-1, 06:2003, Information Technology Equipment Ergonomics The product has been tested and found to comply with all applicable GS ergonomic requirements.

Technical Specifications

	RF Interference	FCC Class B, CE Mark, VCCI
Warranty	Three-year limited hardware warranty.	
	NOTE: Certain restrictions apply. Consult the HP Customer Support Center for details.	
Emulations	Emulation	Terminal ID
	ADDS A2	
	AIXTerm	VT100, VT101, VT102, VT125, VT131, VT132, M2200, VT220, VT240, VT320, VT340, VT420, VT510, VT520, VT525
	ANSI BBS	VT100, VT101, VT102, VT125, VT131, VT132, M2200, VT220, VT240, VT320, VT340, VT420, VT510, VT520, VT525
	AT 386	
	ATT4410	
	DG 410/412	
	HP 700-92/96	70092, 70094, 70096, 2392A, 2622A
	HZ1500	
	IBM3151	Mod11, Mod31, Mod11-28, Mod31-28
	IBM3270	3278-2 (24x80), 3278-3 (32x80), 3278-4 (43x80), 3278-5 (27x132), 3278-2-E (24x80), 3278-3-E (32x80), 3278-4-E (43x80), 3278-5-E (27x132), 3279-2 (24x80), 3279-3 (32x80), 3279-4 (43x80), 3279-5 (27x132), 3287-1
	IBM5250	5291-1, 5292-2, 5251-11, 3179-2, 3196-A1, 3180-2, 3477-FC (27x132), 3477-FG (24x80), 3486-BA, 3487-HA, 3487-HC, 3812-1, 555-B01, 555-C01, 553-B01
	SCO Console	VT100, VT101, VT102, VT125, VT131, VT132, M2200, VT220, VT240, VT320, VT340, VT420, VT510, VT520, VT525
	Stratus V102	
	TA6530	
	Televideo	TVI910, TVI920, TVI925, TVI950, TVI955
	VT52, VT100, VT100+, VT500 (7- or 8-bit)	VT100, VT101, VT102, VT125, VT131, VT132, M2200, VT220, VT240, VT320, VT340, VT420, VT510, VT520, VT525
	VT PCTerm	
	VT HP220, VT UTF8	VT100, VT101, VT102, VT125, VT220, VT240, VT320, VT340, VT420, VT131, VT132, M2200, VT510, VT520, VT525
	Wyse	PCTerm, WY50, WY50+, WY60
Environment-friendly Products and Approach	RoHS Compliance	Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. From July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).
	Material Usage	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/)

Technical Specifications

[supplychain/gen_specifications.html](#)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to:

<http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett

Technical Specifications

Hewlett-Packard Corporate Environmental Information

Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

For more information about HP's commitment to the environment:

[link to new HP white paper now in progress]

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

©Copyright 2009 Hewlett-Packard Development Company, L.P.

Microsoft, Windows, and Windows NT are trademarks and/or registered trademarks of Microsoft Corporation in the United States and other countries.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products and services are set forth in the express limited warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.