



Wyse® Winterm™ 1200LE

The Incredibly Simple and Low Cost Thin Client for Task-based Workers

Low cost, high performance, legacy I/O-free thin client for a pure network-based computing environment.

Wyse is the vendor the world's largest businesses and institutions trust to implement scalable network-centric computing solutions. Wyse® Winterm™ thin clients are a better way to deliver Windows® applications to users throughout your enterprise – especially task-oriented and general office workers. Our broad range of thin-client devices provides security, manageability, affordability, and reliability. They offer greater ease of deployment, administration, and use than any other desktop computing option.

The Winterm 1200LE is a simple terminal for those who need a centralized desktop management option. Because the Winterm 1200LE is a completely stateless device based on the innovative Wyse Blazer operating system, all of the terminal's settings are saved on the server, allowing for more control over the desktop experience. The display-based operating system provides optimized Citrix® ICA and Microsoft® RDP performance, and with all terminal management performed at the server, it is the most easily managed thin client.

The incredibly simple Winterm 1200LE is ideal for users in a LAN environment who use a standard suite of office productivity applications, plus email, and Internet browsing, and who utilize network-based peripherals.

The Winterm 1200LE has a tiny footprint, an attractive design, and can be mounted easily on the wall or the back of your monitor. It comes with fully integrated 16-bit stereo sound capability, 10/100Base-T network support, and optimized I/O with two USB ports.

Plus, as with all Winterm thin clients, the Winterm 1200LE comes bundled with Wyse™ Rapport®, the device management tool that leverages the value of your IT infrastructure for maximum ROI.

Features

Supports ICA and RDP protocol

Multiple session support and seamless Windows

2-3x faster ICA performance than most computers

Supports DHCP management

Stateless plug and play configuration

Free seating

Convection cooled, no moving parts

Modular design connects to any VESA standard monitor

Wi-Fi® 802.11b USB wireless option

Simple Wyse Rapport management

Three-year hassle-free limited warranty

Benefits

Gives administrators the flexibility to choose the protocol that fits their needs

Increased user productivity

Assures maximum user productivity and device life

Permits reconfiguration, firmware upgrades, and customized configurations — from administration server or other desktops

No configuration required to replace devices; installation on "stateless" configuration saves time and support costs

Instantly access personal desktop from anywhere on the network


Quiet, fanless, durable, low operating cost, low service and maintenance

Freedom to choose the monitor that best suits your needs

Reduce wiring costs, easy to create temporary networks

Manages with server-based text files or enterprise class Wyse Rapport

Assurance of reliability, availability, and performance, from the industry leader

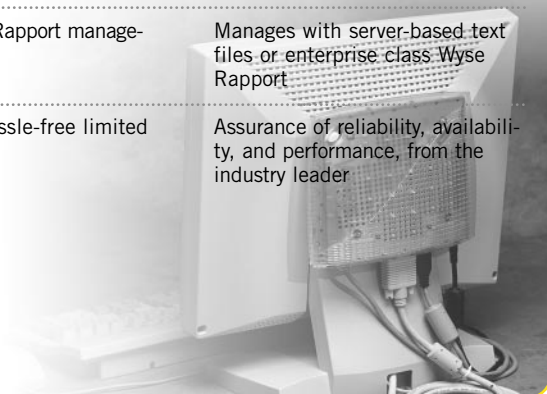

Software

Wyse® Winterm™ 1200LE

Modular Terminal	<ul style="list-style-type: none"> ■ Integrated Citrix ICA and RDP protocols standard with 32MB on board RAM
Firmware Features	<ul style="list-style-type: none"> ■ ICA and RDP, NFuse Lite Client resident
Server OS Compatibility/Support	<ul style="list-style-type: none"> ■ Citrix WinFrame ■ Citrix MetaFrame ■ Microsoft Terminal Server Edition ■ Microsoft Server 2000 and 2003
Set-Up and Configuration	<p>User interface</p> <ul style="list-style-type: none"> ■ Stateless architecture ■ All configuration stored on server ■ Keyboard language support: Belgian Dutch and French¹, Brazilian¹, Canadian French, Danish¹, Dutch¹, Finnish¹, French, German, Italian, Norwegian¹, Polish¹, Portuguese¹, Spanish, Swedish¹, Swiss French¹, Swiss German¹, U.K. English, U.S. English, and more <p>Configuration</p> <ul style="list-style-type: none"> ■ Stateless server-based device configuration ■ Free seating, server-based user configuration
Protocol Support	<ul style="list-style-type: none"> ■ Point-to-Point Protocol (PPP) ■ Windows 2000 RAS support ■ Wi-Fi 802.11b USB (visit www.wyse.com for supported peripherals) ■ Multiple master browser support on ICA ■ Supports Citrix load balancing on ICA ■ DHCP support for automatic firmware upgrades ■ and unit configuration ■ Network printing via LDP ■ PPPoE to connect to WAN via DSL ■ Simple Network Time Protocol (SNTP) ■ TCP/IP, DNS ■ VNC server
Management	<ul style="list-style-type: none"> ■ Remote management, configuration, and upgrades through Wyse Rapport software (agent and Workgroup edition included)

Hardware

Processor	<ul style="list-style-type: none"> ■ AMD Geode GX
Input/Output/Peripheral Support¹	<ul style="list-style-type: none"> ■ Keyboard: enhanced USB with Windows keys (104 keys) included¹; low profile design with two-position tilt; integrated PS/2 mouse port; detachable 5-foot (1.5-meter) cable ■ Mouse: PS/2 mouse included ■ Wheel mouse support for optional third party mouse ■ Local and/or network printers on ICA or LPD ■ VGA-type video output (DB-15) ■ Two USB ports: one port dedicated for USB keyboard, one port available for peripherals
Networking	<ul style="list-style-type: none"> ■ TCP/IP with DNS and DHCP ■ 10/100Base-T Fast Ethernet, twisted pair (RJ-45)
Display Support²	<ul style="list-style-type: none"> ■ VESA monitor support, with DDC for automatic setting of resolution and refresh rate ■ Video: selectable, up to 1280x1024 ■ Colors: 256 (8-bit) or 65,536 (16-bit) ■ Flicker-free, 85 Hz noninterlaced refresh rate ■ ELO Touchscreen with USB
Audio²	<ul style="list-style-type: none"> ■ Output: 1/8-inch mini, full 16-bit stereo, 48 KHz sample rate ■ Input: 1/8-inch 8-bit mini microphone
Physical Characteristics (H x W x D)	<ul style="list-style-type: none"> ■ Height: 1.70 inches (430mm) ■ Width: 7.64 inches (57mm) ■ Depth: 6.18 inches (157mm) ■ Shipping weight: 7.7lbs (3.5kg) ■ Optional wall mount bracket, CRT mount bracket, or bracket to securely mount to the back of LCD panels using VESA compliant mounting holes
Accessories and Add-Ons	<ul style="list-style-type: none"> ■ See www.wyse.com/products/accessories for availability information
Environmental	<p>Temperature range</p> <ul style="list-style-type: none"> ■ Operating: 32° to 104°F (0° to 40° C) ■ Storage: -14° to 140°F (-10° to 60° C) ■ Convection cooling, fanless design <p>Humidity</p> <ul style="list-style-type: none"> ■ 20% to 80% noncondensing <p>Operating altitude range</p> <ul style="list-style-type: none"> ■ 0 to 10,000 feet (0 to 3,050 meters)
Power	<ul style="list-style-type: none"> ■ Worldwide auto-sensing 90-264 VAC, 47-63 Hz ■ Wake-on-LAN ready
Regulatory compliance	<p>Ergonomics</p> <ul style="list-style-type: none"> ■ EK 1/59-98, EK 1/60-98 <p>Safety</p> <ul style="list-style-type: none"> ■ UL 1950, CSA 950 ■ TÜV-GS approved ■ EN 60950 approved <p>RF interference</p> <ul style="list-style-type: none"> ■ FCC Class B ■ CE mark ■ EN55022B ■ VCCI
Warranty	<ul style="list-style-type: none"> ■ Three-year limited warranty



Wyse Technology Inc.
3471 North First Street
San Jose, CA 95134-1801

International Sales:
Australia 61 (0) 2 9492 0180
China 86 10 84973054/55
France 33 1 39 44 00 44
Germany 49 (0) 89 4600990
India 91 80 5154 8888
Singapore 65 6728 9973
UK 44 (0) 118 923 2740
United States 408 473 1200

Wyse Sales:
800 GET WYSE
(800 438 9973)

Visit our websites at:
<http://www.wyse.com.au>
<http://www.wyse.cn>
<http://www.wyse.fr>
<http://www.wyse.de>
<http://www.wyse.in>
<http://www.wyse.co.uk>
<http://www.wyse.com>

Or send email to:
sales@wyse.com

Wyse Customer Service Center:
800 800 WYSE
(800 800 9973)

¹Keyboard not included with international models. ²Monitor, speakers, and microphone not included.

©2005 Wyse Technology Inc. All rights reserved. Wyse, WY, and WyseWorks are registered trademarks, and the Wyse logo, Winterm logo, Winterm, are trademarks of Wyse Technology Inc. Rapport is a registered trademark of Rapport Technologies, Inc., a division of Wyse Technology Inc. Citrix, ICA, MetaFrame, and WinFrame are registered trademarks of Citrix Systems, Inc. Microsoft, Windows, and Windows XP are registered trademarks of Microsoft Corporation. Other product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective companies. Specifications subject to change without notice. Some features require support by server operating system and protocol. A printed copy of the Wyse Technology End User License Agreement is included in the shipping box and provided for your reference only. The license at www.wyse.com/license as of the purchase date is the controlling licensing agreement. By copying, using, or installing the software or the product, you agree to be bound by those terms.
04/05 880923-73 Rev. J